


K-NEBELOE METALLBEHAE T STANDARD-M'

Oil-mist lubricators with metal bowl and metal sight dome

HANSA FLEX

Caracteristici

| | |
|------------------------------------|--|
| Presiune de intrare | Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl) |
| Temperatură mediu | max. 60 °C |
| Temperatură ambientală | Max. 60 °C |
| Debit | 650 l/min |
| Material de etanșare | NBR |
| Carcasă | Die-cast zinc, painted silver |
| Cap ungător | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| Sortiment de ulei | CL 32 acc. to DIN 51517 - ISO VG 32 |
| Măsurarea valorii debitului | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Alte date | User manual on request |

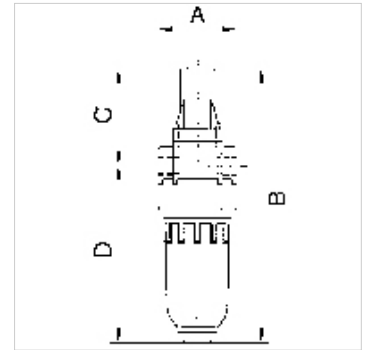

Descriere

Proportional lubricators in compact design, oil can be filled under pressure.

Articol

| Denumire | Filet | A (mm) | B | C (mm) | D (mm) | DN |
|----------------|-------|-----------|----------|-----------|-----------|----|
| K- 07 25 08 84 | G 1/8 | 40,0 | 141,0 mm | 49,0 | 92,0 | 5 |
| K- 07 25 08 86 | G 1/4 | 40,0 | 141,0 mm | 49,0 | 92,0 | 5 |

Piese de schimb

| | |
|------------------------------|---|
| K-ERSATZBEHAELTER MULTI MINI | Spare tank »multifix-mini« & »standard-mini« |
| K-TROPFAUFSATZ POLYCARBO | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL | Drip attachment metal |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples |
| K-XV AGM MS NI | Double nipples, parallel male thread, nickel-plated brass |