

K-ANFAV VARIOBLOC
Manifolds

Caracteristici

Presiune de lucru	2 - 25 bar
Măsurarea valorii debitului	At P1 = 6 bar and pressure drop Δp = 1 bar

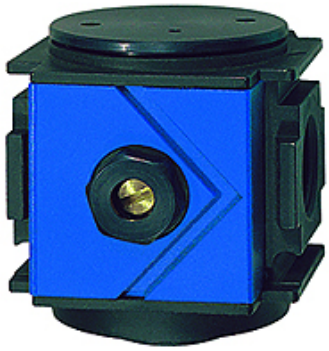

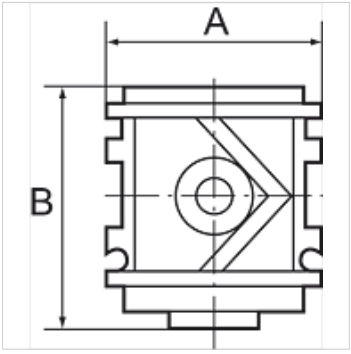

Indicaţie
Alte date sunt disponibile la cerere.

Descriere
For slow pressure build-up in pneumatic systems, e.g. after an emergency stop. The valve opens to full flow at approximately 60% of the set operating pressure.
The filling time can be set by turning the adjusting screw. Used in combination with multi-piece service units.

Articol

Denumire	Filet	Debit (L/min)	A (mm)	B	Presiune de lucru bar
K- 07 25 11 84	G 1/4	1200	48,0	54,0 mm	2 - 25 bar
K- 07 25 11 85	G 3/8	1400	48,0	54,0 mm	2 - 25 bar
K- 07 25 11 86	G 1/2	3800	70,0	72,0 mm	2 - 25 bar
K- 07 25 11 87	G 3/4	4200	70,0	72,0 mm	2 - 25 bar
K- 07 25 11 88	G 1	4200	124,0	72,0 mm	2 - 25 bar

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.