


K-FI REGL PC-BEHÄEL MANO VARIOBLOC

Filter regulators with polycarbonate bowl and pressure gauge

HANSA FLEX

Caracteristici

| | |
|---|---|
| Presiune de intrare | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Temperatură mediu | max. 50 °C |
| Temperatură ambientală | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Mărima porilor în elementul filtrant | 40 µm |
| Material de etanşare | NBR |
| Apărătoare de arc | POM |
| Carcasă | Die-cast zinc |
| Membrană | NBR |
| Drain valve | Manual |
| Măsurarea valorii debitului | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

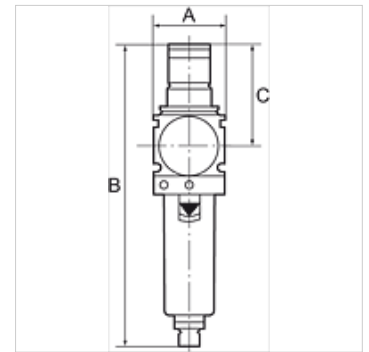

Indicație

Alte date sunt disponibile la cerere.

Descriere

Reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator. The pressure setting can be locked by pushing the knob down. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

Indicații referitoare comandă

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

Informații suplimentare

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

Articol

| Denumire | Filet | Domeniu de reglare | Debit (L/min) | A (mm) | B | C (mm) |
|-----------------------|-------|--------------------|---------------|--------|----------|--------|
| K- 07 25 06 85 | G 1/4 | 0.5 - 10 bar | 2000 | 48,0 | 203,0 mm | 68,0 |
| K- 07 25 06 87 | G 3/8 | 0.5 - 10 bar | 3000 | 48,0 | 203,0 mm | 68,0 |
| K- 07 25 06 89 | G 1/2 | 0.5 - 10 bar | 5500 | 70,0 | 273,0 mm | 98,0 |
| K- 07 25 06 91 | G 3/4 | 0.5 - 10 bar | 6500 | 70,0 | 273,0 mm | 98,0 |
| K- 07 25 06 93 | G 1 | 0.5 - 10 bar | 6500 | 124,0 | 273,0 mm | 98,0 |

Piese de schimb

| | |
|---|--|
| K-VERSCHLEI-SATZ VARIOBLOC | Set of wearing parts |
| K-ERSATZBEHÄELTER VARIOBLOC POLY | Spare tank Polycarbonat |
| K-FILTERELEMENT VARIOBLOC | Filter element |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |