# K-SCHALTVENTILE 3/2 VAROBLOC


On-off valves (3/2-way valves)

HANSA-FLEX

## Caracteristici

| | |
|---|---|
| **Tip de protecţie** | IP 65 acc. to DIN 40050 |
| **Presiune de lucru** | 3 to 10 bar |
| **Măsurarea valorii debitului** | At P1 = 6 bar and pressure drop Δp = 1 bar |



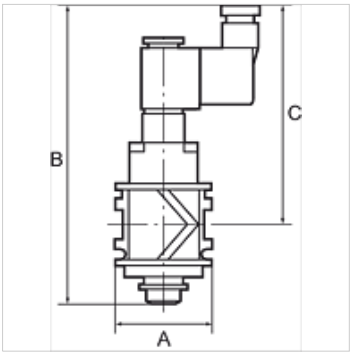


## Indicaţie

Alte date sunt disponibile la cerere.

## Descriere

For pressurising and relieving pneumatic systems. Ideal as the main "on" valve for service units. The pressure in the line is exhausted when the valve is switched off.

## Articol

| Denumire | Filet | Debit (L/min) | A (mm) | Racord | B | C (mm) | Tensiune |
|---|---|---|---|---|---|---|---|
| **K- 07 25 11 94** | G 1/4 | 2200 | 48,0 | Device plug PG 9, type B, EN 175301-803 | 147,0 mm | 108,0 | 24 V DC |
| **K- 07 25 11 95** | G 3/8 | 2600 | 48,0 | Device plug PG 9, type B, EN 175301-803 | 147,0 mm | 108,0 | 24 V DC |
| **K- 07 25 11 96** | G 1/2 | 3300 | 70,0 | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0 | 24 V DC |
| **K- 07 25 11 97** | G 3/4 | 3800 | 70,0 | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0 | 24 V DC |
| **K- 07 25 11 98** | G 1 | 3800 | 124,0 | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0 | 24 V DC |

## Piese de schimb

| | |
|---|---|
| **K-MAGNETSPULE VARIOBLOC** | Solenoid |
| **K-GERAETESTECKER** | Coupling socket |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*