


# K-SCHALTVENTILE 3/2 VAROBLOC

On-off valves (3/2-way valves)

**HANSA FLEX**

## Caracteristici

Tip de protecție	IP 65 acc. to DIN 40050
Presiune de lucru	3 to 10 bar
Măsurarea valorii debitului	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

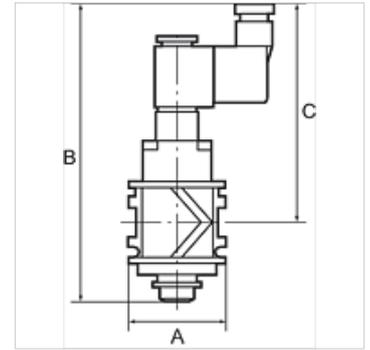

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

For pressurising and relieving pneumatic systems. Ideal as the main "on" valve for service units. The pressure in the line is exhausted when the valve is switched off.

## Articol

Denumire	Filet	Debit (L/min)	A (mm)	Racord	B	C (mm)	Tensiune
K- 07 25 11 94	G 1/4	2200	48,0	Device plug PG 9, type B, EN 175301-803	147,0 mm	108,0	24 V DC
K- 07 25 11 95	G 3/8	2600	48,0	Device plug PG 9, type B, EN 175301-803	147,0 mm	108,0	24 V DC
K- 07 25 11 96	G 1/2	3300	70,0	Device plug PG 9, type B, EN 175301-803	157,0 mm	113,0	24 V DC
K- 07 25 11 97	G 3/4	3800	70,0	Device plug PG 9, type B, EN 175301-803	157,0 mm	113,0	24 V DC
K- 07 25 11 98	G 1	3800	124,0	Device plug PG 9, type B, EN 175301-803	157,0 mm	113,0	24 V DC

## Piese de schimb

K-MAGNETSPULE VARIOBLOC	Solenoid
K-GERAETESTECKER	Coupling socket