


# K-SCHALTVENTILE 3/2 VAROBLOC

On-off valves (3/2-way valves)

**HANSA FLEX**

## Caracteristici

|                             |  |
|-----------------------------|--|
| Tip de protecție            | IP 65 acc. to DIN 40050                            |
| Presiune de lucru           | 3 to 10 bar  |
| Măsurarea valorii debitului | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

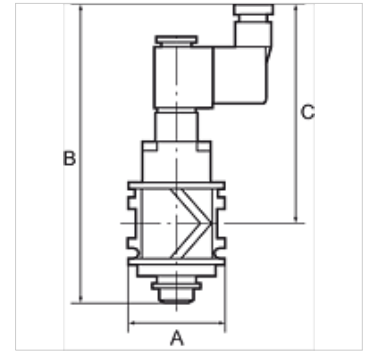

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

For pressurising and relieving pneumatic systems. Ideal as the main "on" valve for service units. The pressure in the line is exhausted when the valve is switched off.

## Articol

| Denumire       | Filet | Debit (L/min) | A (mm) | Racord                                  | B        | C (mm) | Tensiune |
|----------------|-------|---------------|--------|---|----------|--------|----------|
| K- 07 25 11 94 | G 1/4 | 2200          | 48,0   | Device plug PG 9, type B, EN 175301-803 | 147,0 mm | 108,0  | 24 V DC  |
| K- 07 25 11 95 | G 3/8 | 2600          | 48,0   | Device plug PG 9, type B, EN 175301-803 | 147,0 mm | 108,0  | 24 V DC  |
| K- 07 25 11 96 | G 1/2 | 3300          | 70,0   | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0  | 24 V DC  |
| K- 07 25 11 97 | G 3/4 | 3800          | 70,0   | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0  | 24 V DC  |
| K- 07 25 11 98 | G 1   | 3800          | 124,0  | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0  | 24 V DC  |

## Piese de schimb

|                         |                 |
|-------------------------|-----------------|
| K-MAGNETSPULE VARIOBLOC | Solenoid        |
| K-GERAETESTECKER        | Coupling socket |