


# K-NORMZYLINDER

Standard cylinders

**HANSA FLEX**

## Caracteristici

Medii	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Presiune de lucru	Max. 10 bar
Presiune de acționare	0,4 bar (Ø 32 bis Ø 40), 0,3 bar (Ø 50 bis Ø 63), 0,2 bar (Ø 80 bis Ø 125)
Domeniu de temperaturi	-20 °C to +70 °C (Ø 32 to Ø 63) -10 °C to +70 °C (Ø 80 to Ø 125)
Construcție	Heads / jacket with self-tapping screws
Tija piston	C45 steel, hard chrome-plated
Teavă	Anodised aluminium jacket with integrated T-slots
Piston	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 125)
Material de etanșare	NBR

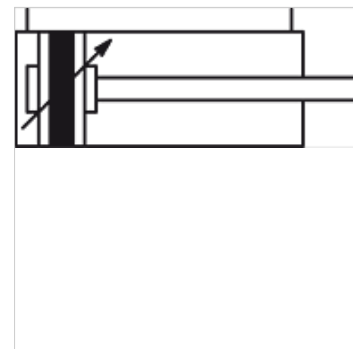

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches can be mounted in two T-slots on the same side as the compressed air supply. <br>Cylinders of the same type can also be supplied on request with fixing parts for magnetic switches on three sides. <br>The version with a 125 mm bore is provided with fixing accessories on three sides as standard.

## Articol

Denumire	Ø piston	Cursa (mm)	Racord	Ø tijă piston (mm)	Filet exterior la tijele pistoanelor
K- 07 15 15 90	32 mm	25	G 1/8	12	M 10 x 1.25
K- 07 15 15 91	32 mm	50	G 1/8	12	M 10 x 1.25
K- 07 15 15 92	32 mm	80	G 1/8	12	M 10 x 1.25
K- 07 15 15 93	32 mm	100	G 1/8	12	M 10 x 1.25
K- 07 15 15 94	32 mm	125	G 1/8	12	M 10 x 1.25
K- 07 15 15 95	32 mm	160	G 1/8	12	M 10 x 1.25
K- 07 15 15 96	32 mm	200	G 1/8	12	M 10 x 1.25
K- 07 15 15 97	32 mm	250	G 1/8	12	M 10 x 1.25
K- 07 15 15 98	32 mm	320	G 1/8	12	M 10 x 1.25
K- 07 15 15 99	32 mm	400	G 1/8	12	M 10 x 1.25
K- 07 15 16 00	32 mm	500	G 1/8	12	M 10 x 1.25
K- 07 15 16 01	32 mm	600	G 1/8	12	M 10 x 1.25
K- 07 15 16 02	32 mm	800	G 1/8	12	M 10 x 1.25
K- 07 15 16 03	40 mm	25	G 1/4	16	M 12 x 1.25
K- 07 15 16 04	40 mm	50	G 1/4	16	M 12 x 1.25
K- 07 15 16 05	40 mm	80	G 1/4	16	M 12 x 1.25
K- 07 15 16 06	40 mm	100	G 1/4	16	M 12 x 1.25
K- 07 15 16 07	40 mm	125	G 1/4	16	M 12 x 1.25
K- 07 15 16 08	40 mm	160	G 1/4	16	M 12 x 1.25
K- 07 15 16 09	40 mm	200	G 1/4	16	M 12 x 1.25
K- 07 15 16 10	40 mm	250	G 1/4	16	M 12 x 1.25
K- 07 15 16 11	40 mm	320	G 1/4	16	M 12 x 1.25
K- 07 15 16 12	40 mm	400	G 1/4	16	M 12 x 1.25
K- 07 15 16 13	40 mm	500	G 1/4	16	M 12 x 1.25
K- 07 15 16 14	40 mm	600	G 1/4	16	M 12 x 1.25
K- 07 15 16 15	40 mm	800	G 1/4	16	M 12 x 1.25
K- 07 15 16 16	50 mm	25	G 1/4	20	M 16 x 1.5
K- 07 15 16 17	50 mm	50	G 1/4	20	M 16 x 1.5
K- 07 15 16 18	50 mm	80	G 1/4	20	M 16 x 1.5
K- 07 15 16 19	50 mm	100	G 1/4	20	M 16 x 1.5
K- 07 15 16 20	50 mm	125	G 1/4	20	M 16 x 1.5
K- 07 15 16 21	50 mm	160	G 1/4	20	M 16 x 1.5
K- 07 15 16 22	50 mm	200	G 1/4	20	M 16 x 1.5
K- 07 15 16 23	50 mm	250	G 1/4	20	M 16 x 1.5
K- 07 15 16 24	50 mm	320	G 1/4	20	M 16 x 1.5



În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.

28.06.2024

HANSA-FLEX AG

www.hansa-flex.com

1

# K-NORMZYLINDER

Standard cylinders

**HANSA FLEX**

## Articol

Denumire	Ø piston	Cursa (mm)	Racord	Ø tijă piston (mm)	Filet exterior la tijele pistoanelor
K- 07 15 16 25	50 mm	400	G 1/4	20	M 16 x 1.5
K- 07 15 16 26	50 mm	500	G 1/4	20	M 16 x 1.5
K- 07 15 16 27	50 mm	600	G 1/4	20	M 16 x 1.5
K- 07 15 16 28	50 mm	800	G 1/4	20	M 16 x 1.5
K- 07 15 16 29	63 mm	25	G 3/8	20	M 16 x 1.5
K- 07 15 16 30	63 mm	50	G 3/8	20	M 16 x 1.5
K- 07 15 16 31	63 mm	80	G 3/8	20	M 16 x 1.5
K- 07 15 16 32	63 mm	100	G 3/8	20	M 16 x 1.5
K- 07 15 16 33	63 mm	125	G 3/8	20	M 16 x 1.5
K- 07 15 16 34	63 mm	160	G 3/8	20	M 16 x 1.5
K- 07 15 16 35	63 mm	200	G 3/8	20	M 16 x 1.5
K- 07 15 16 36	63 mm	250	G 3/8	20	M 16 x 1.5
K- 07 15 16 37	63 mm	320	G 3/8	20	M 16 x 1.5
K- 07 15 16 38	63 mm	400	G 3/8	20	M 16 x 1.5
K- 07 15 16 39	63 mm	500	G 3/8	20	M 16 x 1.5
K- 07 15 16 40	63 mm	600	G 3/8	20	M 16 x 1.5
K- 07 15 16 41	63 mm	800	G 3/8	20	M 16 x 1.5
K- 07 15 16 42	80 mm	25	G 3/8	25	M 20 x 1.5
K- 07 15 16 43	80 mm	50	G 3/8	25	M 20 x 1.5
K- 07 15 16 44	80 mm	80	G 3/8	25	M 20 x 1.5
K- 07 15 16 45	80 mm	100	G 3/8	25	M 20 x 1.5
K- 07 15 16 46	80 mm	125	G 3/8	25	M 20 x 1.5
K- 07 15 16 47	80 mm	160	G 3/8	25	M 20 x 1.5
K- 07 15 16 48	80 mm	200	G 3/8	25	M 20 x 1.5
K- 07 15 16 49	80 mm	250	G 3/8	25	M 20 x 1.5
K- 07 15 16 50	80 mm	320	G 3/8	25	M 20 x 1.5
K- 07 15 16 51	80 mm	400	G 3/8	25	M 20 x 1.5
K- 07 15 16 52	80 mm	500	G 3/8	25	M 20 x 1.5
K- 07 15 16 53	80 mm	600	G 3/8	25	M 20 x 1.5
K- 07 15 16 54	80 mm	800	G 3/8	25	M 20 x 1.5
K- 07 15 15 64	100 mm	25	G 1/2"	25	M 20 x 1.5
K- 07 15 15 65	100 mm	50	G 1/2"	25	M 20 x 1.5
K- 07 15 15 66	100 mm	80	G 1/2"	25	M 20 x 1.5
K- 07 15 15 67	100 mm	100	G 1/2"	25	M 20 x 1.5
K- 07 15 15 68	100 mm	125	G 1/2"	25	M 20 x 1.5
K- 07 15 15 69	100 mm	160	G 1/2"	25	M 20 x 1.5
K- 07 15 15 70	100 mm	200	G 1/2"	25	M 20 x 1.5
K- 07 15 15 71	100 mm	250	G 1/2"	25	M 20 x 1.5
K- 07 15 15 72	100 mm	320	G 1/2"	25	M 20 x 1.5
K- 07 15 15 73	100 mm	400	G 1/2"	25	M 20 x 1.5
K- 07 15 15 74	100 mm	500	G 1/2"	25	M 20 x 1.5
K- 07 15 15 75	100 mm	600	G 1/2"	25	M 20 x 1.5
K- 07 15 15 76	100 mm	800	G 1/2"	25	M 20 x 1.5
K- 07 15 15 77	125 mm	25	G 1/2"	32	M 27 x 2
K- 07 15 15 78	125 mm	50	G 1/2"	32	M 27 x 2
K- 07 15 15 79	125 mm	80	G 1/2"	32	M 27 x 2
K- 07 15 15 80	125 mm	100	G 1/2"	32	M 27 x 2
K- 07 15 15 81	125 mm	125	G 1/2"	32	M 27 x 2
K- 07 15 15 82	125 mm	160	G 1/2"	32	M 27 x 2
K- 07 15 15 83	125 mm	200	G 1/2"	32	M 27 x 2
K- 07 15 15 84	125 mm	250	G 1/2"	32	M 27 x 2
K- 07 15 15 85	125 mm	320	G 1/2"	32	M 27 x 2
K- 07 15 15 86	125 mm	400	G 1/2"	32	M 27 x 2
K- 07 15 15 87	125 mm	500	G 1/2"	32	M 27 x 2
K- 07 15 15 88	125 mm	600	G 1/2"	32	M 27 x 2
K- 07 15 15 89	125 mm	800	G 1/2"	32	M 27 x 2

## Accesorii

K-FUSSBEFESTIGUNG 3	Foot model
K-SCHWENKGABELBEFESTIG	Female hinge model
K-SCHWENKAUGENBEFEST 1	Male hinge model
K-SPHAERISCHE SCHWENKAUGENB	Articulated male hinge model
K-GEGENLAGER 1	Counter-hinge model



În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.

28.06.2024

HANSA-FLEX AG

www.hansa-flex.com

2

# K-NORMZYLINDER

Standard cylinders

**HANSA FLEX**

---