


# K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

**HANSA FLEX**

## Caracteristici

Medii	Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Presiune de lucru	Max. 10 bar
Presiune de acționare	0,4 bar (Ø 32 und Ø 40), 0,3 bar (Ø 50)
Domeniu de temperaturi	-10 °C to +80 °C
Construcție	Screwed joint between stainless steel barrel and heads
Tija piston	C45 steel, hard chrome-plated
Teavă	Anodised aluminium
Piston	Technopolymer
Material de etanșare	NBR

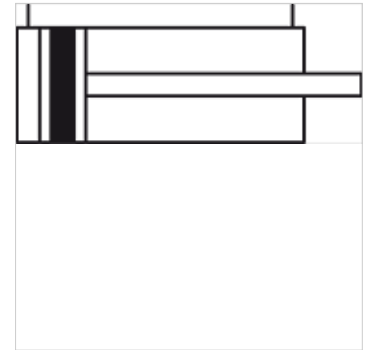

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

Version with magnetic piston

## Indicații referitoare comandă

Note: 500 mm is the maximum stroke available for the double-acting type.

## Informații suplimentare

Important: The scope of supply does not include a connector. Please order separately.

Note: 500 mm is the maximum stroke available for the double-acting type.

## Articol

Denumire	Ø piston	Cursa (mm)	Racord	Filet tija piston
K- 07 15 17 29	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 17 30	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 17 31	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 17 32	32 mm	100	G 1/8	M 10 x 1.25
K- 07 15 17 33	32 mm	125	G 1/8	M 10 x 1.25
K- 07 15 17 34	32 mm	160	G 1/8	M 10 x 1.25
K- 07 15 17 35	32 mm	200	G 1/8	M 10 x 1.25
K- 07 15 17 36	32 mm	250	G 1/8	M 10 x 1.25
K- 07 15 17 37	32 mm	320	G 1/8	M 10 x 1.25
K- 07 15 17 38	32 mm	400	G 1/8	M 10 x 1.25
K- 07 15 17 39	32 mm	500	G 1/8	M 10 x 1.25
K- 07 15 17 40	40 mm	25	G 1/4	M 12 x 1.25
K- 07 15 17 41	40 mm	50	G 1/4	M 12 x 1.25
K- 07 15 17 42	40 mm	80	G 1/4	M 12 x 1.25
K- 07 15 17 43	40 mm	100	G 1/4	M 12 x 1.25
K- 07 15 17 44	40 mm	125	G 1/4	M 12 x 1.25
K- 07 15 17 45	40 mm	160	G 1/4	M 12 x 1.25
K- 07 15 17 46	40 mm	200	G 1/4	M 12 x 1.25
K- 07 15 17 47	40 mm	250	G 1/4	M 12 x 1.25
K- 07 15 17 48	40 mm	320	G 1/4	M 12 x 1.25
K- 07 15 17 49	40 mm	400	G 1/4	M 12 x 1.25
K- 07 15 17 50	40 mm	500	G 1/4	M 12 x 1.25
K- 07 15 17 51	50 mm	25	G 1/4	M 16 x 1.5
K- 07 15 17 52	50 mm	50	G 1/4	M 16 x 1.5
K- 07 15 17 53	50 mm	80	G 1/4	M 16 x 1.5
K- 07 15 17 54	50 mm	100	G 1/4	M 16 x 1.5
K- 07 15 17 55	50 mm	125	G 1/4	M 16 x 1.5
K- 07 15 17 56	50 mm	160	G 1/4	M 16 x 1.5
K- 07 15 17 57	50 mm	200	G 1/4	M 16 x 1.5
K- 07 15 17 58	50 mm	250	G 1/4	M 16 x 1.5



În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.

16.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

# K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

## Articol

Denumire	Ø piston	Cursa (mm)	Racord	Filet tijă piston
K- 07 15 17 59	50 mm	320	G 1/4	M 16 x 1.5
K- 07 15 17 60	50 mm	400	G 1/4	M 16 x 1.5
K- 07 15 17 61	50 mm	500	G 1/4	M 16 x 1.5

## Accesorii

K-FUSSBEFESTIGUNG 2	Foot model
K-KOPFMUTTER DECKEL BODEN	Hexagon nut (for head)
K-GABELKOEPFER 4	Fork model
K-GELENKAUGEN 5	Rod eye model
K-SCHWENKLAGER 2	Counter-hinge model
K-SENSORHALTER	Sensor support (with T-slot adapter)
K-SENSOREN T-NUT 1	Sensor for T-slot