# K-RUNDZYLINDER DOPP O D 1


Round cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

## Caracteristici

| | |
|---|---|
| **Medii** | Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| **Presiune de lucru** | Max. 10 bar |
| **Presiune de acţionare** | 0,4 bar (Ø 32 und Ø 40), 0,3 bar (Ø 50) |
| **Domeniu de temperaturi** | -10 °C to +80 °C |
| **Construcţie** | Screwed joint between stainless steel barrel and heads |
| **Tija piston** | C45 steel, hard chrome-plated |
| **Ţeavă** | Anodised aluminium |
| **Piston** | Technopolymer |
| **Material de etanşare** | NBR |



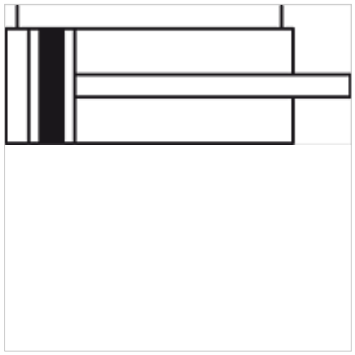

## Indicaţie

Alte date sunt disponibile la cerere.

## Descriere

Version with magnetic piston

## Indicaţii referitoare comandă

Note: 500 mm is the maximum stroke available for the double-acting type.

## Informaţii suplimentare

Important: The scope of supply does not include a connector. Please order separately.

Note: 500 mm is the maximum stroke available for the double-acting type.

## Articol

| Denumire | Ø piston | Cursa (mm) | Racord | Filet tijă piston |
|---|---|---|---|---|
| **K- 07 15 17 29** | 32 mm | 25 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 30** | 32 mm | 50 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 31** | 32 mm | 80 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 32** | 32 mm | 100 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 33** | 32 mm | 125 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 34** | 32 mm | 160 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 35** | 32 mm | 200 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 36** | 32 mm | 250 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 37** | 32 mm | 320 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 38** | 32 mm | 400 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 39** | 32 mm | 500 | G 1/8 | M 10 x 1.25 |
| **K- 07 15 17 40** | 40 mm | 25 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 41** | 40 mm | 50 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 42** | 40 mm | 80 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 43** | 40 mm | 100 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 44** | 40 mm | 125 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 45** | 40 mm | 160 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 46** | 40 mm | 200 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 47** | 40 mm | 250 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 48** | 40 mm | 320 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 49** | 40 mm | 400 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 50** | 40 mm | 500 | G 1/4 | M 12 x 1.25 |
| **K- 07 15 17 51** | 50 mm | 25 | G 1/4 | M 16 x 1.5 |
| **K- 07 15 17 52** | 50 mm | 50 | G 1/4 | M 16 x 1.5 |
| **K- 07 15 17 53** | 50 mm | 80 | G 1/4 | M 16 x 1.5 |
| **K- 07 15 17 54** | 50 mm | 100 | G 1/4 | M 16 x 1.5 |
| **K- 07 15 17 55** | 50 mm | 125 | G 1/4 | M 16 x 1.5 |
| **K- 07 15 17 56** | 50 mm | 160 | G 1/4 | M 16 x 1.5 |
| **K- 07 15 17 57** | 50 mm | 200 | G 1/4 | M 16 x 1.5 |
| **K- 07 15 17 58** | 50 mm | 250 | G 1/4 | M 16 x 1.5 |

*În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.*

# K-RUNDZYLINDER DOPP O D 1

Round cylinders, double acting (magnetic, non-cushioned)

## Articol

| Denumire | Ø piston | Cursa (mm) | Racord | Filet tijă piston |
|---|---|---|---|---|
| **K- 07 15 17 59** | 50 mm | 320 | G 1/4 | M 16 x 1.5 |
| **K- 07 15 17 60** | 50 mm | 400 | G 1/4 | M 16 x 1.5 |
| **K- 07 15 17 61** | 50 mm | 500 | G 1/4 | M 16 x 1.5 |

## Accesorii

| | |
|---|---|
| **K-FUSSBEFESTIGUNG 2** | Foot model |
| **K-KOPFMUTTER DECKEL BODEN** | Hexagon nut (for head) |
| **K-GABELKOEPFE 4** | Fork model |
| **K-GELENKAUGEN 5** | Rod eye model |
| **K-SCHWENKLAGER 2** | Counter-hinge model |
| **K-SENSORHALTER** | Sensor support (with T-slot adapter) |
| **K-SENSOREN T-NUT 1** | Sensor for T-slot |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*