
K-STOPPVENTILE IG

Stop valves, ports 2 and 3 with female thread

Caracteristici

Presiune de lucru	Max. 10 bar
Presiune de comandă	1 - 5 bar, depending on operating pressure
Temperatură mediu	max. 70 °C
Poziţie de montare	Any. Ring pieces can still be rotated 360° after the valve has been tightened
Material	Alamă nichelată
Material de etanşare	Perbunan



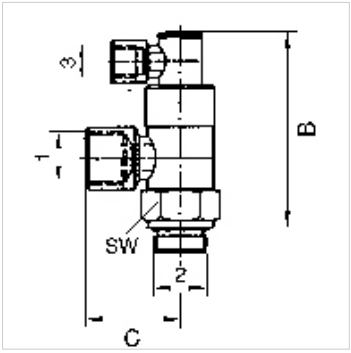

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

For high-speed positioning and stop functions as well as emergency switching (e.g. emergency stop). If a control signal is present at port 3, air can flow to and from the cylinder. If no control signal is present, the air flow to and from the cylinder is shut off, causing the cylinder to stop in the required position. Stop valves are screwed directly onto the cylinder instead of the normal pipe connections.

Articol

Denumire	Port 1	Port 2	Conexiunea 3	B (mm)	C (mm)
K- 07 15 20 46	G 1/8	G 1/8	G 1/8	52,0	21,0
K- 07 15 20 45	G 1/4	G 1/4	G 1/8	58,0	25,0
K- 07 15 20 47	G 3/8	G 3/8	G 1/8	63,0	31,0
K- 07 15 20 44	G 1/2	G 1/2	G 1/8	72,0	40,0

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.