
# K-STOPPVENTILE STECK

Stop valves, ports 2 and 3 with plug connection

## Caracteristici

| | |
|---|---|
| **Presiune de lucru** | Max. 10 bar |
| **Presiune de comandă** | 1 - 5 bar, depending on operating pressure |
| **Temperatură mediu** | max. 70 °C |
| **Poziţie de montare** | Any. Ring pieces can still be rotated 360° after the valve has been tightened |
| **Material de etanşare** | Perbunan |



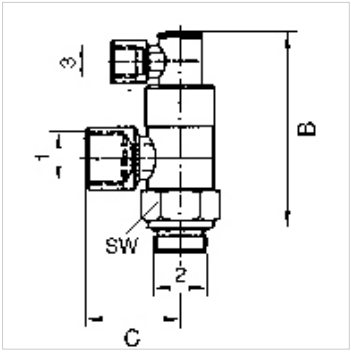


## Indicaţie

Alte date sunt disponibile la cerere.

## Descriere

For high-speed positioning and stop functions as well as emergency switching (e.g. emergency stop). If a control signal is present at port 3, air can flow to and from the cylinder. If no control signal is present, the air flow to and from the cylinder is shut off, causing the cylinder to stop in the required position. Stop valves are screwed directly onto the cylinder instead of the normal pipe connections.

## Articol

| Denumire | Port 1 | Port 2 | Conexiunea 3 | Material | B (mm) | C (mm) |
|---|---|---|---|---|---|---|
| **K- 07 15 20 50** | G 1/8 | 6 mm | 4 mm | Nickel-plated brass | 52,0 | 25,0 |
| **K- 07 15 20 49** | G 1/4 | 6 mm | 4 mm | Nickel-plated brass | 58,0 | 28,0 |
| **K- 07 15 20 51** | G 3/8 | 8 mm | 4 mm | Nickel-plated brass | 63,0 | 32,0 |
| **K- 07 15 20 48** | G 1/2 | 12 mm | 4 mm | Nickel-plated brass | 72,0 | 41,0 |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*