
K-DRV ABLD GEW C RAENDEL

Unidirectional flow control valves, outgoing air restriction (»C«), screw connection

Caracteristici

Presiune de lucru	max. 10 bari
Domeniu de temperaturi	0 °C to +70 °C
Şurub tubular, braţ pivotant, şurub de reglare	Nickel-plated brass
Piese interioare	Brass with a bare metal surface
Buză de etanşare inel O	NBR
Garnituri de etanşare (captive)	Polyamide (glass fibre-reinforced)



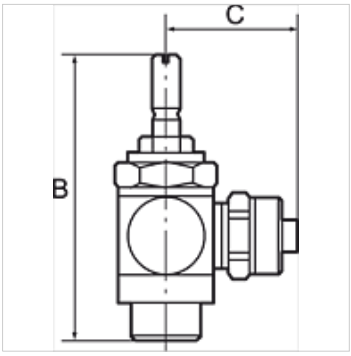

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

For fine regulation of a cylinder piston speed and precise control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece. Can be screwed directly onto the valve or cylinder. Compact type of construction, also ideal where space is restricted. On the version with a knurled screw, the set volumetric flow rate can be locked with the hexagon nut to obtain a fixed setting.

Articol

Denumire	Racord	C (mm)	Filet	Deschiderea cheii fixe	B (mm)
K- 07 15 04 57	M 5 female thread	11,5	M 5	8 mm	38,9
K- 07 15 04 62	G 1/8 female thread	16,0	G 1/8	14 mm	42,0
K- 07 15 04 58	G 1/4 female thread	22,0	G 1/4	17 mm	51,0
K- 07 15 25 14	G 1/2 female thread	32,0	G 1/2	26 mm	81,0
K- 07 15 25 15	G 3/8 female thread	26,0	G 3/8	20 mm	63,0

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.