


K-VHR IS BUND

Hexagon socket screw plugs with collar

HANSA FLEX

Caracteristici

| | |
|------------------------|----------------------------------|
| Presiune de lucru | 10 bar |
| Temperatură mediu | max. +90 °C |
| Temperatură ambientală | Max. +90 °C |
| Tip constructiv | Capac filetat cu locaş hexagonal |
| Material | Brass with a bare metal surface |

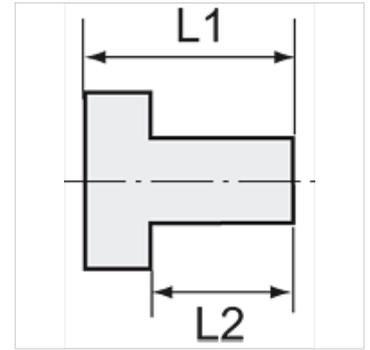

Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Alte date sunt disponibile la cerere.

Informații suplimentare

Further types and dimensions on request.

Articol

| Denumire | Filet | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|-------|------------|------------|------------------------|
| K- 07 40 10 22 | G 1/8 | 11,0 | 8,0 | 5 mm |
| K- 07 40 10 23 | G 1/4 | 13,0 | 10,0 | 6 mm |
| K- 07 40 10 24 | G 3/8 | 15,0 | 12,0 | 8 mm |
| K- 07 40 10 25 | G 1/2 | 18,0 | 14,0 | 10 mm |
| K- 07 40 45 21 | G 3/4 | 24,0 | 20,0 | 12 mm |
| K- 07 40 45 24 | G 1 | 27,0 | 22,0 | 17 mm |