
K-VHRO IS OR MS NI

Hexagon socket screw plugs with O-ring

Caracteristici

Temperatura de lucru	Max. 80 °C (with O-ring, NBR)
Presiune	Max. 60 bar
Tip constructiv	Capac filetat cu locaș hexagonal
Material	Alamă nichelată



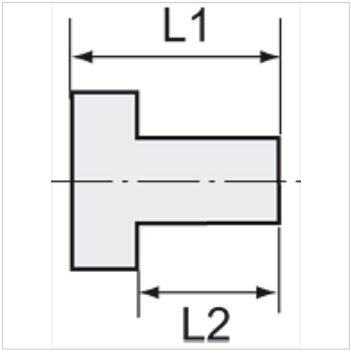

Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Alte date sunt disponibile la cerere.

Descriere

Suitable for air, water, oil, steam, etc.

Informații suplimentare

Further types and dimensions on request.

Articol

Denumire	Filet	Locaș hexagonal (mm)	L1 (mm)	L2 (mm)
K- 07 40 39 91	M 5	2,5	6,5	4,0
K- 07 40 39 92	G 1/8	3,0	9,5	7,0
K- 07 40 39 93	G 1/4	6,0	11,0	8,0
K- 07 40 39 94	G 3/8	8,0	12,5	9,0
K- 07 40 39 95	G 1/2	10,0	14,5	11,0
K- 07 40 44 09	G 3/4	17,0	20,0	15,5
K- 07 40 44 10	G 1	19,0	21,0	16,0

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.