

# K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

**HANSA FLEX**

## Caracteristici

Domeniu de temperaturi -20 °C to +60 °C

Presiune Max. 12 bar



Domeniu de presiune Max. 12 bar

Temperatură -20 °C to +60 °C

Debit 0 - 400 l/min

Arc Stainless-steel

Carcasă Brass

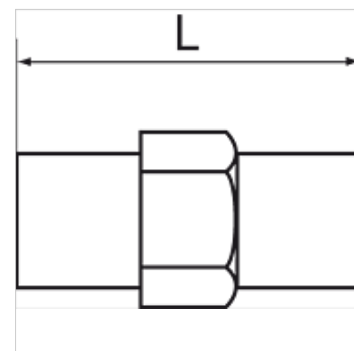

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

## Articol

Denumire	Filet	Presiune de lucru setată în prealabil	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0