



# K-WTST SAFETY BK SCHA AN DR HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and pressure regulator

**HANSA FLEX**

## Caracteristici

|                                    |   |
|------------------------------------|---|
| Presiune de intrare                | 2.5 - 16 bar  |
| Presiune de ieșire                 | 0.5 - 8 bar   |
| Domeniu de temperaturi             | -10 °C to +50 °C  |
| Medii                              | Aer comprimat   |
| Material de etanșare               | NBR   |
| Filet de conectare                 | Material: Die-cast zinc   |
| Recipient                          | Polycarbonate (with bayonet lock) and bowl guard                  |
| Element filtrant                   | Cellpor (PE) 5 μm   |
| Carcasă                            | Material: Grivory® (PA 66)  |
| Membrană                           | NBR   |
| Consum de aer propriu              | Max. 1.5 l/min (depending on secondary pressure)                  |
| Măsurarea valorii debitului        | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |
| Racord de dezaerare Ventil cu bliă | Silencer  |

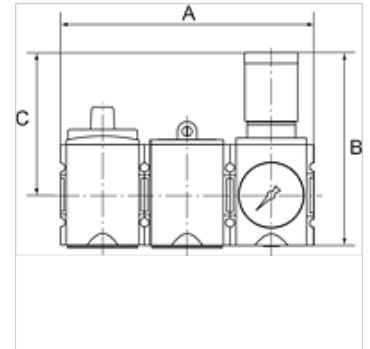

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Indicații referitoare comandă

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

## Articol

| Denumire       | Filet | Domeniu de reglare | Debit (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|--------------------|---------------|--------|----------|--------|
| K- 07 25 15 20 | G 1/4 | 2.5 - 8 bar        | 2000          | 156,0  | 128,5 mm | 95,5   |
| K- 07 25 15 21 | G 3/8 | 2.5 - 8 bar        | 2000          | 156,0  | 128,5 mm | 95,5   |
| K- 07 25 15 22 | G 3/8 | 2.5 - 8 bar        | 4300          | 189,0  | 149,5 mm | 110,0  |
| K- 07 25 15 23 | G 1/2 | 2.5 - 8 bar        | 4300          | 189,0  | 149,5 mm | 110,0  |
| K- 07 25 15 24 | G 3/4 | 2.5 - 8 bar        | 10000         | 255,0  | 191,0 mm | 137,0  |
| K- 07 25 15 25 | G 1   | 2.5 - 8 bar        | 10000         | 255,0  | 191,0 mm | 137,0  |

## Accesorii

|                    |          |
|--------------------|----------|
| K-STECKSCHLOSS     | Key lock |
| K-VORHAENGESCHLOSS | Padlock  |