

K-SCHALLDAE SINTERBR GE MS1

Silencers, sintered bronze, with brass hexagon nut and brass thread


HANSA FLEX

Caracteristici

Presiune de lucru 0 - 8 bar

Temperatura de lucru -10 °C to +250 °C

Nivel de zgomot 6 bari 71 ~ 108 dB(A)

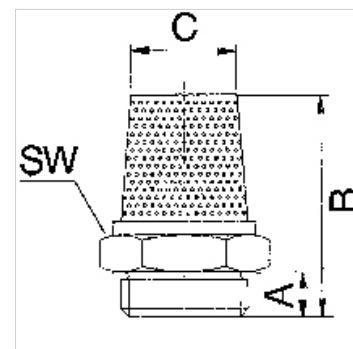

Indicație

Alte date sunt disponibile la cerere.

Descriere

For reducing the exhaust noise generated by pneumatic equipment.

Articol

| Denumire | Filet | A (mm) | B (mm) | C (mm) | Deschiderea cheii fixe |
|----------------|-------|-----------|-----------|-----------|------------------------|
| K- 07 40 34 70 | M 5 | 5,0 | 18,5 | 4,0 | 9 mm |
| K- 07 40 34 71 | G 1/8 | 4,5 | 21,0 | 8,5 | 12 mm |
| K- 07 40 34 72 | G 1/4 | 6,0 | 28,0 | 11,0 | 15 mm |
| K- 07 40 34 73 | G 3/8 | 7,0 | 35,5 | 14,0 | 19 mm |
| K- 07 40 34 74 | G 1/2 | 8,0 | 41,5 | 16,0 | 23 mm |
| K- 07 40 34 75 | G 3/4 | 9,0 | 53,0 | 21,0 | 30 mm |
| K- 07 40 34 76 | G 1 | 12,0 | 67,0 | 27,0 | 36 mm |