


# K-DRG WASSER NIEDRIGER HINTERDRUCK

Pressure regulators for water, low outlet pressure (max. 2 bar)

**HANSA FLEX**

## Caracteristici

|                                |  |
|--------------------------------|--|
| <b>Presiune de intrare</b>     | Max. 16 bar (low-pressure type), Max. 25 bar (high-pressure type)  |
| <b>Formular tipizat</b>        | Min. 1.2 bar (low-pressure type), Max. 2.5 bar (high-pressure type)  |
| <b>Cădere de presiune min.</b> | 1 bar  |
| <b>Temperatura de lucru</b>    | Max. 75 °C   |
| <b>Garnituri</b>               | NBR-SBR  |
| <b>Apărătoare de arc</b>       | Plastic PA 6 (up to DN 32, low-pressure type), Hot-pressed brass (up to DN 32, high-pressure type), Cast iron (from DN 40) |
| <b>Carcasă</b>                 | Bronze (Rg5)   |
| <b>Piese interioare</b>        | Plastic, brass, stainless steel  |

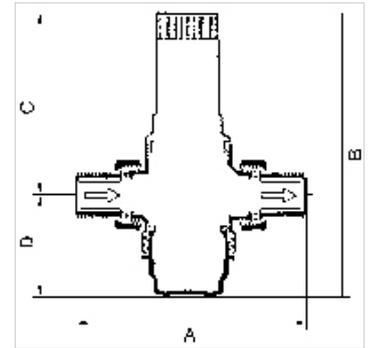

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

Pressure regulator with pressure-reduced single-seated piston valve or single-seated diaphragm valve and built-in strainer. Specially designed for use with water. <br>The device is also suitable for all other applications involving neutral non-sticky liquids, air and neutral non-flammable gases.

## Articol

| Denumire       | Filet   | DN | Domeniu de reglare | Debit valoare kvs (m <sup>3</sup> /h) | A (mm) | B        | C (mm) | D (mm) |
|----------------|---------|----|--------------------|---------------------------------------|--------|----------|--------|--------|
| K- 07 25 04 51 | R 1/2   | 15 | 0.2 - 2 bar        | 2,9                                   | 137,0  | 154,0 mm | 127,0  | 27,0   |
| K- 07 25 04 52 | R 3/4   | 20 | 0.2 - 2 bar        | 3,9                                   | 141,0  | 154,0 mm | 127,0  | 27,0   |
| K- 07 25 04 53 | R 1     | 25 | 0.2 - 2 bar        | 5,4                                   | 160,6  | 154,0 mm | 126,0  | 28,5   |
| K- 07 25 04 54 | R 1 1/4 | 32 | 0.2 - 2 bar        | 6,1                                   | 177,2  | 156,0 mm | 109,0  | 47,0   |
| K- 07 25 04 55 | R 1 1/2 | 40 | 0.2 - 2 bar        | 12,0                                  | 210,0  | 359,0 mm | 300,0  | 59,0   |
| K- 07 25 04 56 | R 2     | 50 | 0.2 - 2 bar        | 13,0                                  | 210,0  | 361,0 mm | 300,0  | 61,0   |

## Piese de schimb

K-DICHTSAETZE DRUCKREGLER Seal kits Pressure regulators for drinking water, DVGW-tested acc. to EN 1567 and for water and liquid