K-DRG DRV 225 HOCHDRUCK


DRV 225 pressure regulators, high-pressure type

HANSA-FLEX

Caracteristici

Presiune de intrare	Max. 25 bar (Series 200 and 300 Series), Max. 40 bar (400 Series)
Domeniu de temperaturi	Max. 75 °C
Raport de reducere	Max. 10:1 (200 Series), Max. 20:1 (300 Series), Max. 6:1 (400 Series)
Material de etanşare	NBR
Apărătoare de arc	Pressed brass up to DN 25, Grey cast iron from DN 32
Carcasă	Red brass 2.1096.01



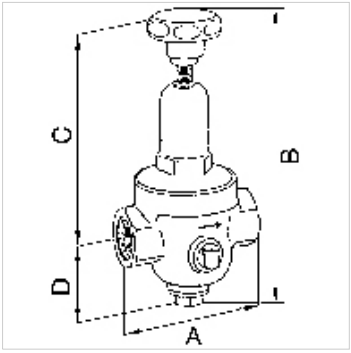

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Diaphragm pressure regulators with non-self-relieving design and non-pressure-reduced single-seated valve. Very precise adjustment. Good response characteristic because of only a few moving parts which hence minimal friction. Ideal for compressed air, nitrogen and other neutral, non-flammable gases, but only suitable for liquids with comparatively low flow rates.

Indicaţii referitoare comandă

Alte modele la cerere

Informaţii suplimentare

Alte modele la cerere

Articol

Denumire	Filet	Domeniu de reglare	Debit valoare kvs (m3/h)	A (mm)	B	C (mm)	D (mm)
K- 07 25 04 97	G 1/4	1.5 - 20 bar	0,5	70,0	188,0 mm	141,0	47,0
K- 07 25 04 98	G 3/8	1.5 - 20 bar	0,6	70,0	188,0 mm	141,0	47,0
K- 07 25 04 99	G 1/2	1.5 - 20 bar	1,2	85,0	228,5 mm	182,0	46,5
K- 07 25 05 00	G 3/4	1.5 - 20 bar	1,3	85,0	228,5 mm	182,0	46,5
K- 07 25 05 01	G 1	1.5 - 20 bar	1,6	95,0	257,0 mm	201,0	56,0
K- 07 25 05 02	G 1 1/4	1.5 - 20 bar	4,2	104,0	385,0 mm	324,0	61,0
K- 07 25 05 03	G 1 1/2	1.5 - 20 bar	4,5	108,0	392,0 mm	331,0	61,0
K- 07 25 05 04	G 2	1.5 - 20 bar	7,2	146,5	419,0 mm	349,0	70,0

Piese de schimb

K-VERSCHLEI-SATZ	Set of wearing parts

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.