



K-SAUGKOERBE FUER RUECKSCHLAGV

Strainers for check valves

HANSA FLEX

Caracteristici

| | |
|---------------------------------|------------------------|
| Descriere filet | Stainless steel 1.4301 |
| Domeniu de temperaturi | max. +150 °C |
| Material de etanșare | NBR |
| Carcasă, țesătură pentru filtre | Stainless steel 1.4301 |

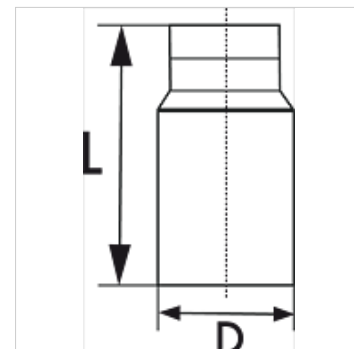

Descriere

Corrosion resistant screw-in strainer, all stainless steel, to suit foot-operated or check valves.

Articol

| Denumire | Filet | D (mm) | L (mm) | Lărgimea ochiului (mm) |
|----------------|---------|-----------|-----------|---------------------------|
| K- 07 30 30 52 | G 3/8 | 19,0 | 55,0 | 1,0 |
| K- 07 30 30 47 | G 1/2 | 22,0 | 55,0 | 1,0 |
| K- 07 30 30 51 | G 3/4 | 29,0 | 62,0 | 1,0 |
| K- 07 30 30 44 | G 1 | 36,0 | 71,0 | 1,0 |
| K- 07 30 30 46 | G 1 1/4 | 43,0 | 80,0 | 1,0 |
| K- 07 30 30 45 | G 1 1/2 | 49,0 | 90,0 | 1,0 |
| K- 07 30 30 48 | G 2 | 60,0 | 101,0 | 1,0 |
| K- 07 30 30 49 | G 2 1/2 | 80,0 | 111,0 | 1,8 |
| K- 07 30 30 50 | G 3 | 92,0 | 125,0 | 1,8 |