

K-L-STECK VB MINI

Union elbows, mini

HANSA FLEX

Caracteristici

Presiune de lucru Max. 10 bar, vacuum

Domeniul de utilizare Air, vacuum


furtunuri recomandate PU or PA (nylon)

Medii Aer comprimat

Domeniu de temperaturi 0 °C to +60 °C

Material Plastic, Nickel plated brass

Inel de presiune Plastic

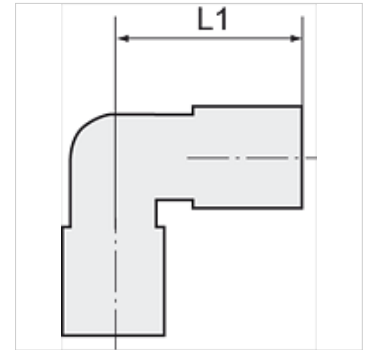

Indicație

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Articol

Denumire	pentru Ø exterior furtun	L1 (mm)
K- 07 40 23 84	3 mm	12,0
K- 07 40 23 85	4 mm	14,5
K- 07 40 23 86	6 mm	16,0