



K-XRD STECKANSCHLUSS Z SCH AGR OR

Straight non-return valves, flow direction from port to tube, parallel male thread with O-ring

HANSA FLEX

Caracteristici

| | |
|------------------------|--|
| Presiune de lucru | Max. 10 bar, vacuum |
| Domeniul de utilizare | Air, vacuum |
| furtunuri recomandate | PU or PA (nylon) |
| Medii | Aer comprimat |
| Standard | M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring |
| Domeniu de temperaturi | 0 °C to +60 °C |
| Suprafață de etanșare | O-ring (NBR) |
| Material | Plastic, Nickel plated brass |
| Inel de presiune | Plastic |

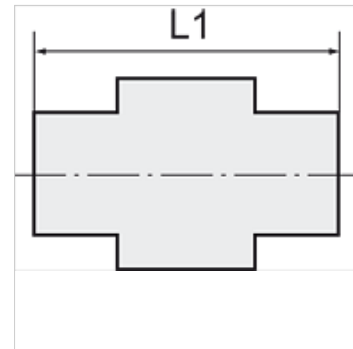

Indicație

Alte date sunt disponibile la cerere.

Descriere

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Articol

| Denumire | Filet | pentru Ø exterior furtun | L1 (mm) | Presiune inițială (bar) | Deschiderea cheii fixe |
|----------------|-------|--------------------------|------------|----------------------------|------------------------|
| K- 07 40 08 73 | M 5 | 4 mm | 31,0 | 0,2 | 10 mm |
| K- 07 40 08 68 | G 1/8 | 4 mm | 24,2 | 0,2 | 14 mm |
| K- 07 40 08 69 | G 1/8 | 6 mm | 31,0 | 0,2 | 14 mm |
| K- 07 40 08 70 | G 1/8 | 8 mm | 32,8 | 0,2 | 14 mm |
| K- 07 40 08 66 | G 1/4 | 6 mm | 33,0 | 0,2 | 17 mm |
| K- 07 40 08 67 | G 1/4 | 8 mm | 34,8 | 0,2 | 17 mm |
| K- 07 40 08 71 | G 3/8 | 10 mm | 41,0 | 0,2 | 20 mm |
| K- 07 40 08 72 | G 3/8 | 12 mm | 42,5 | 0,2 | 21 mm |
| K- 07 40 08 64 | G 1/2 | 10 mm | 43,0 | 0,2 | 24 mm |
| K- 07 40 08 65 | G 1/2 | 12 mm | 44,5 | 0,2 | 24 mm |