


K-T-STECK VB MINI

Union tees, mini

HANSA FLEX

Caracteristici

Presiune de lucru	Max. 10 bar, vacuum
Domeniul de utilizare	Air, vacuum
furtunuri recomandate	PU or PA (nylon)
Medii	Aer comprimat
Domeniu de temperaturi	0 °C to +60 °C
Material	Plastic, Nickel plated brass
Inel de presiune	Plastic

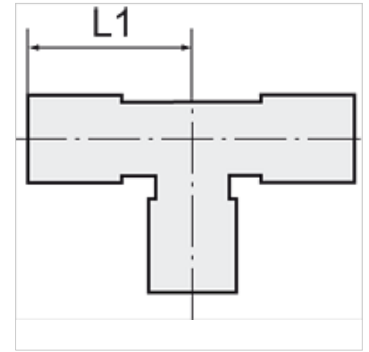

Indicație

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Articol

Denumire	pentru Ø exterior furtun	L1 (mm)
K- 07 40 23 40	3 mm	11,8
K- 07 40 23 41	4 mm	14,5
K- 07 40 23 42	6 mm	16,0