



K-STECKVERBINDU ST RED M

Reducers with push-in plug, mini

HANSA FLEX

Caracteristici

Presiune de lucru	Max. 10 bar, vacuum
Domeniul de utilizare	Air, vacuum
furtunuri recomandate	PU or PA (nylon)
Medii	Aer comprimat
Domeniu de temperaturi	0 °C to +60 °C
Material	Plastic, Nickel plated brass
Inel de presiune	Plastic

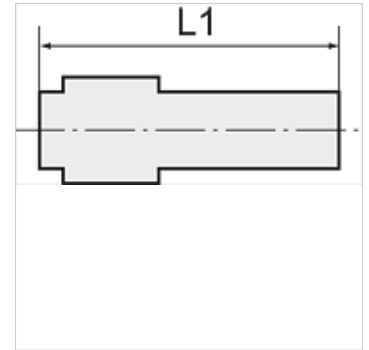

Indicație

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Articol

Denumire	pentru Ø exterior furtun	L1 (mm)
K- 07 40 50 13	4 mm / 3 mm	28,8
K- 07 40 50 14	6 mm / 4 mm	32,2