



# K-XRD STECKANSCHLUSS Z SCH AGR-K BE

Straight non-return valves, flow direction from port to tube, conical male thread, coated

**HANSA FLEX**

## Caracteristici

Presiune de lucru	Max. 10 bar, vacuum
Domeniul de utilizare	Air, vacuum
furtunuri recomandate	PU or PA (nylon)
Medii	Aer comprimat
Standard	R thread acc. to ISO 7-1, thread coating
Domeniu de temperaturi	0 °C to +60 °C
Suprafață de etanșare	Conical version: thread coating
Material	Plastic, Nickel plated brass
Inel de presiune	Plastic

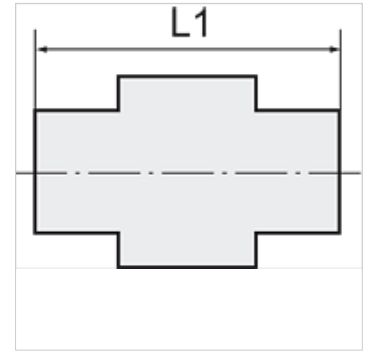

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Articol

Denumire	Filet	pentru Ø exterior furtun	L1 (mm)	Presiune inițială (bar)	Deschiderea cheii fixe
K- 07 40 08 88	R 1/8	4 mm	24,0	0,2	10 mm
K- 07 40 08 89	R 1/8	6 mm	31,0	0,2	12 mm
K- 07 40 08 90	R 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 86	R 1/4	6 mm	33,0	0,2	14 mm
K- 07 40 08 87	R 1/4	8 mm	34,8	0,2	14 mm
K- 07 40 08 91	R 3/8	10 mm	41,0	0,2	17 mm
K- 07 40 08 92	R 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 84	R 1/2	10 mm	43,0	0,2	21 mm
K- 07 40 08 85	R 1/2	12 mm	44,5	0,2	21 mm