



K-XRD STECKANSCHLUSS Z GEW AGR OR

Straight non-return valves, flow direction from tube to port, parallel male thread with O-ring

HANSA FLEX

Caracteristici

Presiune de lucru	Max. 10 bar, vacuum
Domeniul de utilizare	Air, vacuum
furtunuri recomandate	PU or PA (nylon)
Medii	Aer comprimat
Standard	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring
Domeniu de temperaturi	0 °C to +60 °C
Suprafață de etanșare	O-ring (NBR)
Material	Plastic, Nickel plated brass
Inel de presiune	Plastic

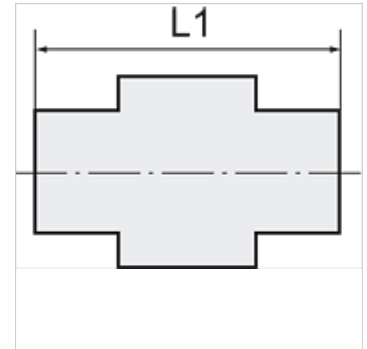

Indicație

Alte date sunt disponibile la cerere.

Descriere

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Articol

Denumire	Filet	pentru Ø exterior furtun	L1 (mm)	Presiune inițială (bar)	Deschiderea cheii fixe
K- 07 40 08 83	M 5	4 mm	31,0	0,2	10 mm
K- 07 40 08 78	G 1/8	4 mm	24,2	0,2	14 mm
K- 07 40 08 79	G 1/8	6 mm	31,0	0,2	14 mm
K- 07 40 08 80	G 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 76	G 1/4	6 mm	33,0	0,2	17 mm
K- 07 40 08 77	G 1/4	8 mm	34,8	0,2	17 mm
K- 07 40 08 81	G 3/8	10 mm	41,0	0,2	20 mm
K- 07 40 08 82	G 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 74	G 1/2	10 mm	43,0	0,2	24 mm
K- 07 40 08 75	G 1/2	12 mm	44,5	0,2	24 mm