
K-T-VB PP
Union tees

Caracteristici

Presiune de lucru	on request
Temperatura de lucru	Max. +20 °C
Material	Polypropylene (PP)
Material de etanşare	NBR



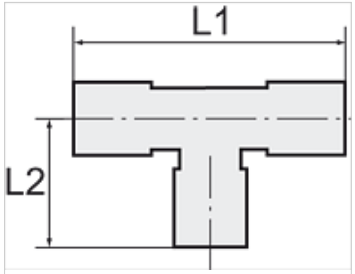

Indicaţie
Alte date sunt disponibile la cerere.

Descriere
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articol

Denumire	pentru Ø exterior furtun	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.