

# K-XRD STECKANSCHLUSS

Straight non-return valves with plug connection

**HANSA FLEX**

## Caracteristici

**Presiune de lucru** Max. 10 bar, vacuum

**Domeniul de utilizare** Air, vacuum

**furtunuri recomandate** PU or PA (nylon)


**Medii** Aer comprimat

**Domeniu de temperaturi** 0 °C to +60 °C

**Suprafață de etanșare** O-ring (NBR)

**Material** Plastic, Nickel plated brass

**Inel de presiune** Plastic

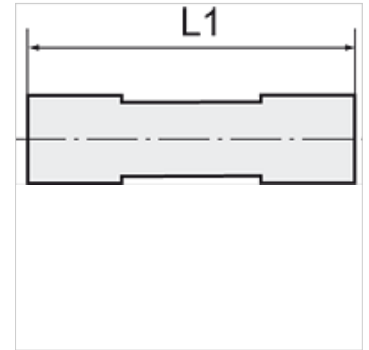

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Articol

Denumire	pentru Ø exterior furtun	L1 (mm)	Presiune inițială (bar)
K- 07 40 09 02	4 mm	47,0	0,2
K- 07 40 09 03	6 mm	46,0	0,2
K- 07 40 09 04	8 mm	51,0	0,2
K- 07 40 09 05	10 mm	62,0	0,2
K- 07 40 09 06	12 mm	64,0	0,2