

K-XRD STECKANSCHLUSS

Straight non-return valves with plug connection

HANSA FLEX

Caracteristici

Presiune de lucru Max. 10 bar, vacuum

Domeniul de utilizare Air, vacuum

furtunuri recomandate PU or PA (nylon)


Medii Aer comprimat

Domeniu de temperaturi 0 °C to +60 °C

Suprafață de etanșare O-ring (NBR)

Material Plastic, Nickel plated brass

Inel de presiune Plastic

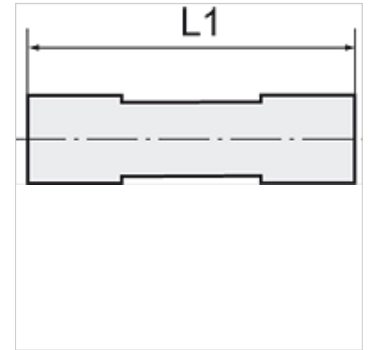

Indicație

Alte date sunt disponibile la cerere.

Descriere

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Articol

Denumire	pentru Ø exterior furtun	L1 (mm)	Presiune inițială (bar)
K- 07 40 09 02	4 mm	47,0	0,2
K- 07 40 09 03	6 mm	46,0	0,2
K- 07 40 09 04	8 mm	51,0	0,2
K- 07 40 09 05	10 mm	62,0	0,2
K- 07 40 09 06	12 mm	64,0	0,2