

K-SV POM
Bulkhead connectors

Caracteristici

Presiune de lucru	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Temperatura de lucru	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material	Acetalpolymerisat (POM)
Material de etanşare	NBR



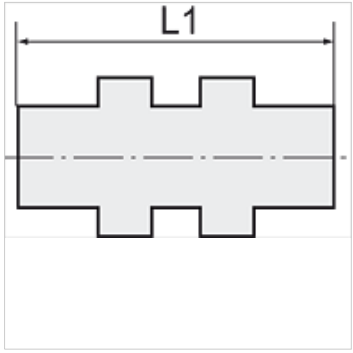

Indicaţie
Alte date sunt disponibile la cerere.

Descriere
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articol

Denumire	Filet	pentru Ø exterior furtun	L1 (mm)	Deschiderea cheii fixe
K- 07 40 28 77	G 3/8	6 mm	36,5	19 mm
K- 07 40 28 76	G 1/2	8 mm	42,0	22 mm

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.