
K-T-RED VERBINDER POM

Union tees, unequal

Caracteristici

Presiune de lucru	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Temperatura de lucru	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material	Acetalpolymerisat (POM)
Material de etanşare	NBR



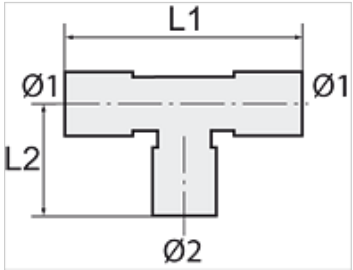

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articol

Denumire	pentru Ø1 exterior furtun (mm)	pentru Ø2 exterior furtun (mm)	L1 (mm)	L2 (mm)
K- 07 40 28 74	18	15	87,0	40,0
K- 07 40 28 75	22	15	90,0	42,0

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.