

K-DRV 2

Unidirectional flow control valves

Caracteristici


Presiune de lucru max. 10 bari

Temperatura de lucru 0 °C to +150 °C

Material de etanșare FKM

Carcasă Stainless steel 1.4404

Piese interioare Stainless steel 1.4404

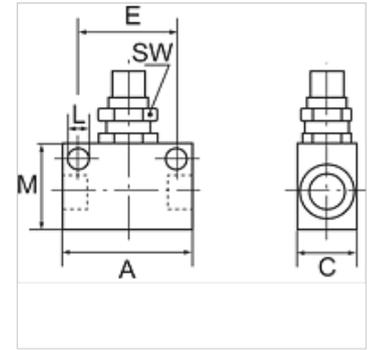

Indicație

Alte date sunt disponibile la cerere.

Descriere

Unidirectional flow control valve, restricted in the flow direction and free passage in the opposite direction.

Articol

Denumire	Filet	A (mm)	C (mm)	E (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 41	G 1/8	34,0	15,0	24,0	4,5	20,0	14
K- 07 30 12 42	G 1/4	50,0	25,0	35,0	5,5	30,0	22