


K-DV 2

Bidirectional flow control valves

Caracteristici

| | |
|----------------------|------------------------|
| Presiune de lucru | max. 10 bari |
| Temperatura de lucru | 0 °C to +150 °C |
| Piese interioare | Stainless steel 1.4404 |
| Material de etanșare | FKM |
| Carcasă | Stainless steel 1.4404 |

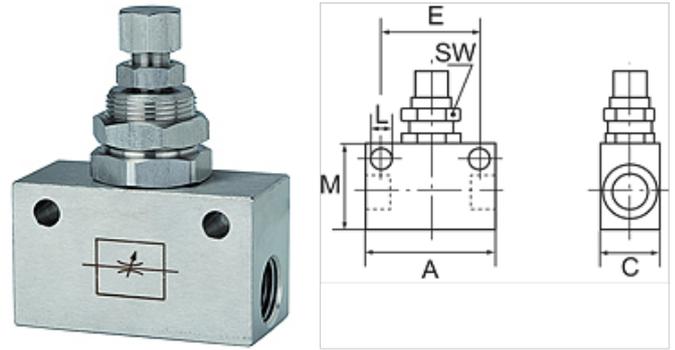

Indicație

Alte date sunt disponibile la cerere.

Descriere

Straight-way valves with restricted flow in both directions.

Articol

| Denumire | Filet | A (mm) | C (mm) | E (mm) | L (mm) | M (mm) | SW (mm) |
|----------------|-------|-----------|-----------|-----------|-----------|-----------|------------|
| K- 07 30 12 47 | G 1/8 | 34,0 | 15,0 | 24,0 | 4,5 | 20,0 | 14 |
| K- 07 30 12 48 | G 1/4 | 50,0 | 25,0 | 35,0 | 5,5 | 30,0 | 22 |