
K-DV 2

Bidirectional flow control valves

Caracteristici

Presiune de lucru	max. 10 bari
Temperatura de lucru	0 °C to +150 °C
Piese interioare	Stainless steel 1.4404
Material de etanşare	FKM
Carcasă	Stainless steel 1.4404



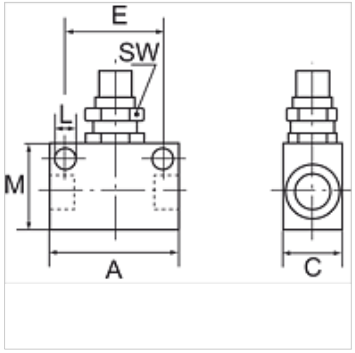

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Straight-way valves with restricted flow in both directions.

Articol

Denumire	Filet	A (mm)	C (mm)	E (mm)	L (mm)	M (mm)	SW (mm)
K- 07 30 12 47	G 1/8	34,0	15,0	24,0	4,5	20,0	14
K- 07 30 12 48	G 1/4	50,0	25,0	35,0	5,5	30,0	22

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.