


K-FI MIKRO BIS 60 BAR

Micro-filters for high pressures up to 60 bar

HANSA FLEX

Caracteristici

Presiune de intrare	Max. 60 bar
Temperatura de lucru	0 °C to +90 °C
Randament	99.9999 %
Mărimea porilor în elementul filtrant	0.01 µm
Material de etanşare	NBR
Recipient	Brass
Element filtrant	Borosilicate
Carcasă	Aluminium
Măsurarea valorii debitului	At P2 = 6 bar and pressure drop $\Delta p = 0,5$ bar

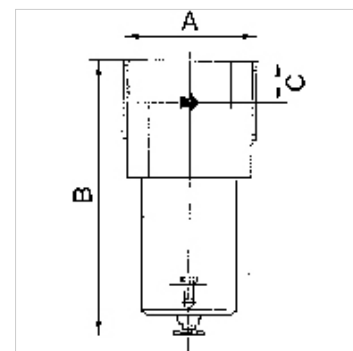

Indicație

Alte date sunt disponibile la cerere.

Descriere

Fine filter for all applications with particularly strict compressed air purity requirements. Micro-filters should always be used in conjunction with a standard filter connected upstream to trap coarse impurities and protect the micro-filter inserts.

Articol

Denumire	Filet	Debit (L/min)	A (mm)	B	C (mm)
K- 07 25 06 21	G 3/8	2000	73,0	187,0 mm	25,0
K- 07 25 06 22	G 1/2	2000	65,0	187,0 mm	25,0
K- 07 25 06 23	G 3/4	2300	92,0	196,0 mm	29,0
K- 07 25 06 24	G 1	2300	80,0	196,0 mm	29,0

Accesorii

K-HALTERBAUSATZ Holder

Piese de schimb

K-FILTERELEMENT STANDARD Filter element