


# K-L-AGR-K OR DRH VA

Male run tees, conical male thread acc. to ISO 7-1, stainless steel

**HANSA FLEX**

## Caracteristici

<b>Domeniu de presiune</b>	Max. 25 bar
<b>furtunuri recomandate</b>	PTFE hose
<b>Domeniu de temperaturi</b>	-40 °C to +200 °C (depending on the hose quality and diameter)
<b>Material</b>	Oțel superior 1.4404
<b>Garnitură de etanșare</b>	Pure metal

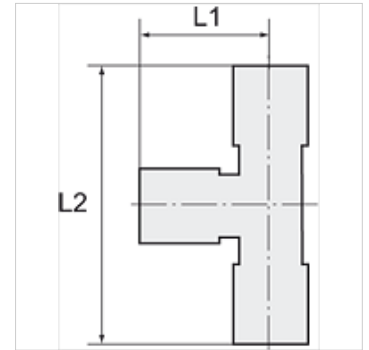

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

Supplied without seals. For use with corrosive media and at high temperatures. Screw fitting series made of stainless steel for all applications where compliance with strict tightness, pressure and temperature requirements is essential. The parts are manufactured without rubber seals, in other words they are ideal for very high temperatures or for use with corrosive liquids, e.g. in cases when FPM is no longer suitable.

## Articol

Denumire	Filet	pentru furtun	L1 (mm)	L2 (mm)	Deschiderea cheii 1 (mm)	Deschiderea cheii 2 (mm)
<b>K- 07 40 30 51</b>	R 1/8	6 mm / 4 mm	23,0	40,0	12	10
<b>K- 07 40 30 52</b>	R 1/8	8 mm / 6 mm	23,0	40,0	14	10
<b>K- 07 40 30 49</b>	R 1/4	6 mm / 4 mm	23,0	44,5	12	10
<b>K- 07 40 30 50</b>	R 1/4	8 mm / 6 mm	23,0	44,5	14	10
<b>K- 07 40 30 48</b>	R 1/4	10 mm / 8 mm	26,0	47,5	16	12