
# K-VLST L AG IG MS NI

Extensions, long, parallel - nickel-plated brass

## Caracteristici

| | |
|---|---|
| **Temperatura de lucru** | Max. 150 °C |
| **Presiune** | Max. 60 bar |
| **Material** | Alamă nichelată |



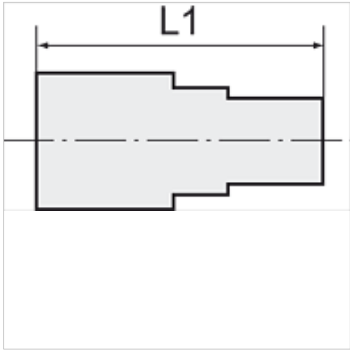


## Indicaţie

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Alte date sunt disponibile la cerere.

## Descriere

Suitable for air, water, oil, steam, etc.

## Informaţii suplimentare

Further types and dimensions on request.

## Articol

| Denumire | Filet exterior | Filet interior | L1 (mm) | Deschiderea cheii fixe |
|---|---|---|---|---|
| **K- 07 40 39 16** | G 1/8 | G 1/8 | 22,0 | 14 mm |
| **K- 07 40 39 17** | G 1/8 | G 1/8 | 42,0 | 14 mm |
| **K- 07 40 39 18** | G 1/8 | G 1/8 | 51,0 | 14 mm |
| **K- 07 40 39 19** | G 1/8 | G 1/8 | 100,0 | 14 mm |
| **K- 07 40 39 20** | G 1/4 | G 1/4 | 35,0 | 17 mm |
| **K- 07 40 39 21** | G 1/4 | G 1/4 | 51,0 | 17 mm |
| **K- 07 40 39 22** | G 1/4 | G 1/4 | 100,0 | 17 mm |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*