


K-RD NIPPEL AGRK IGR MS NI

Reducing nipples, conical male thread, parallel female thread - nickel-plated brass

HANSA FLEX

Caracteristici

| | |
|----------------------|-----------------|
| Temperatura de lucru | Max. 150 °C |
| Presiune | Max. 60 bar |
| Material | Alamă nichelată |

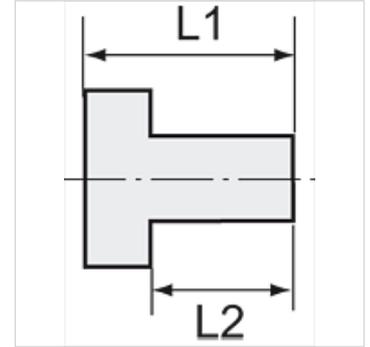

Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Alte date sunt disponibile la cerere.

Descriere

Suitable for air, water, oil, steam, etc.

Informații suplimentare

Further types and dimensions on request.

Articol

| Denumire | Filet exterior | Filet interior | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|----------------|----------------|---------|---------|------------------------|
| K- 07 40 15 66 | R 1/4 | G 1/8 | 16,0 | 11,0 | 14 mm |
| K- 07 40 15 67 | R 3/8 | G 1/8 | 17,0 | 11,5 | 17 mm |
| K- 07 40 15 68 | R 3/8 | G 1/4 | 17,0 | 11,5 | 17 mm |
| K- 07 40 15 69 | R 1/2 | G 1/8 | 19,5 | 14,0 | 22 mm |
| K- 07 40 15 70 | R 1/2 | G 1/4 | 20,0 | 14,0 | 22 mm |
| K- 07 40 15 71 | R 1/2 | G 3/8 | 20,0 | 14,0 | 22 mm |
| K- 07 40 15 72 | R 3/4 | G 3/8 | 23,0 | 16,5 | 27 mm |
| K- 07 40 15 73 | R 3/4 | G 1/2 | 23,0 | 16,5 | 27 mm |
| K- 07 40 15 74 | R 1 | G 1/2 | 25,0 | 16,0 | 34 mm |
| K- 07 40 15 75 | R 1 | G 3/4 | 25,0 | 18,0 | 34 mm |