

K-WV 5/2 BEIDS PNEU

5/2-way spool valves, double pneumatic

Caracteristici

Funcţie	5/2-way
Presiune de lucru	2.5 - 10 bar; Max. vacuum 10 bar (external pilot air)
Presiune de lucru min.	2,5 bar
Domeniu de temperaturi	-10 °C to +60 °C
Debit 6 bari şi 10 bari	1500 Nl/min (G 1/4), 4600 Nl/min (G 1/2)
Conexiune electrică	Coupler plug PG 9 - form B
Tip de protecţie	IP 65 (DIN 46244)
Carcasă	Anodised aluminium, blue
Sertar cilindric	Stainless steel
Material de etanşare	NBR



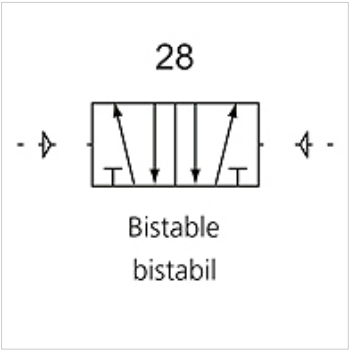

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality.
The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems.
Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

Articol

Denumire	Racord	DN	Număr schemă electrică	Comandă
K- 07 15 02 19	G 1/4	8	28	
K- 07 15 02 20	G 1/2"	15	28	

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.