
K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned, male piston rod

Caracteristici

Medii	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Presiune de lucru	Max. 10 bar
Presiune de acţionare	0,6 bar (Ø 20 bis Ø 32), 0,4 bar (Ø 40 bis Ø 100)
Domeniu de temperaturi	-10 °C to +60 °C (Ø 20 to Ø 63) -10 °C to +80 °C (Ø 80 bis Ø 100)
Tija piston	C45 steel, hard chrome-plated
Ţeavă	Anodised aluminium jacket with T-slots
Piston	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 100)
Material de etanşare	NBR



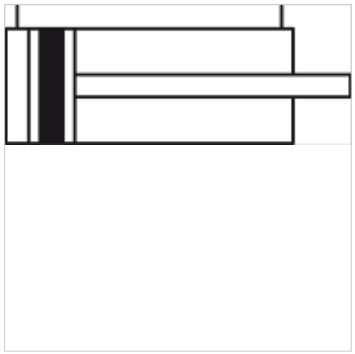

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

New series acc. to ISO 21287 characterised by a very short and compact design. The standard type features a magnetic piston. Piston rod optionally with male or female thread.

Articol

Denumire	Ø piston	Cursa (mm)	Racord	Filet exterior la tijele pistoanelor
K- 07 15 08 09	20 mm	5	M 5	M 8
K- 07 15 08 10	20 mm	10	M 5	M 8
K- 07 15 08 11	20 mm	15	M 5	M 8
K- 07 15 08 12	20 mm	20	M 5	M 8
K- 07 15 08 13	20 mm	25	M 5	M 8
K- 07 15 08 14	20 mm	30	M 5	M 8
K- 07 15 08 15	20 mm	40	M 5	M 8
K- 07 15 08 16	20 mm	50	M 5	M 8
K- 07 15 08 17	20 mm	60	M 5	M 8
K- 07 15 08 18	25 mm	5	M 5	M 8
K- 07 15 08 19	25 mm	10	M 5	M 8
K- 07 15 08 20	25 mm	15	M 5	M 8
K- 07 15 08 21	25 mm	20	M 5	M 8
K- 07 15 08 22	25 mm	25	M 5	M 8
K- 07 15 08 23	25 mm	30	M 5	M 8
K- 07 15 08 24	25 mm	40	M 5	M 8
K- 07 15 08 25	25 mm	50	M 5	M 8
K- 07 15 08 26	25 mm	60	M 5	M 8
K- 07 15 08 27	32 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 28	32 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 29	32 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 30	32 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 31	32 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 32	32 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 33	32 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 34	32 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 35	32 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 36	32 mm	80	G 1/8	M 10 x 1.25
K- 07 15 08 37	40 mm	5	G 1/8	M 10 x 1.25
K- 07 15 08 38	40 mm	10	G 1/8	M 10 x 1.25
K- 07 15 08 39	40 mm	15	G 1/8	M 10 x 1.25
K- 07 15 08 40	40 mm	20	G 1/8	M 10 x 1.25
K- 07 15 08 41	40 mm	25	G 1/8	M 10 x 1.25
K- 07 15 08 42	40 mm	30	G 1/8	M 10 x 1.25
K- 07 15 08 43	40 mm	40	G 1/8	M 10 x 1.25
K- 07 15 08 44	40 mm	50	G 1/8	M 10 x 1.25
K- 07 15 08 45	40 mm	60	G 1/8	M 10 x 1.25
K- 07 15 08 46	40 mm	80	G 1/8	M 10 x 1.25

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.

K-KOMP ZYL DOPPELW AG

Compact cylinders, double-acting (with magnet), non-cushioned, male piston rod

HANSA-FLEX

Articol

Denumire	Ø piston	Cursa (mm)	Racord	Filet exterior la tijele pistoanelor
K- 07 15 08 47	50 mm	5	G 1/8	M 12 x 1.25
K- 07 15 08 48	50 mm	10	G 1/8	M 12 x 1.25
K- 07 15 08 49	50 mm	15	G 1/8	M 12 x 1.25
K- 07 15 08 50	50 mm	20	G 1/8	M 12 x 1.25
K- 07 15 08 51	50 mm	25	G 1/8	M 12 x 1.25
K- 07 15 08 52	50 mm	30	G 1/8	M 12 x 1.25
K- 07 15 08 53	50 mm	40	G 1/8	M 12 x 1.25
K- 07 15 08 54	50 mm	50	G 1/8	M 12 x 1.25
K- 07 15 08 55	50 mm	60	G 1/8	M 12 x 1.25
K- 07 15 08 56	50 mm	80	G 1/8	M 12 x 1.25
K- 07 15 08 57	63 mm	5	G 1/8	M 12 x 1.25
K- 07 15 08 58	63 mm	10	G 1/8	M 12 x 1.25
K- 07 15 08 59	63 mm	15	G 1/8	M 12 x 1.25
K- 07 15 08 60	63 mm	20	G 1/8	M 12 x 1.25
K- 07 15 08 61	63 mm	25	G 1/8	M 12 x 1.25
K- 07 15 08 62	63 mm	30	G 1/8	M 12 x 1.25
K- 07 15 08 63	63 mm	40	G 1/8	M 12 x 1.25
K- 07 15 08 64	63 mm	50	G 1/8	M 12 x 1.25
K- 07 15 08 65	63 mm	60	G 1/8	M 12 x 1.25
K- 07 15 08 66	63 mm	80	G 1/8	M 12 x 1.25
K- 07 15 08 67	80 mm	5	G 1/8	M 16 x 1.5
K- 07 15 08 68	80 mm	10	G 1/8	M 16 x 1.5
K- 07 15 08 69	80 mm	15	G 1/8	M 16 x 1.5
K- 07 15 08 70	80 mm	20	G 1/8	M 16 x 1.5
K- 07 15 08 71	80 mm	25	G 1/8	M 16 x 1.5
K- 07 15 08 72	80 mm	30	G 1/8	M 16 x 1.5
K- 07 15 08 73	80 mm	40	G 1/8	M 16 x 1.5
K- 07 15 08 74	80 mm	50	G 1/8	M 16 x 1.5
K- 07 15 08 75	80 mm	60	G 1/8	M 16 x 1.5
K- 07 15 08 76	80 mm	80	G 1/8	M 16 x 1.5
K- 07 15 07 99	100 mm	5	G 1/8	M 16 x 1.5
K- 07 15 08 00	100 mm	10	G 1/8	M 16 x 1.5
K- 07 15 08 01	100 mm	15	G 1/8	M 16 x 1.5
K- 07 15 08 02	100 mm	20	G 1/8	M 16 x 1.5
K- 07 15 08 03	100 mm	25	G 1/8	M 16 x 1.5
K- 07 15 08 04	100 mm	30	G 1/8	M 16 x 1.5
K- 07 15 08 05	100 mm	40	G 1/8	M 16 x 1.5
K- 07 15 08 06	100 mm	50	G 1/8	M 16 x 1.5
K- 07 15 08 07	100 mm	60	G 1/8	M 16 x 1.5
K- 07 15 08 08	100 mm	80	G 1/8	M 16 x 1.5

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.