
# K-ELEKTRISCHE ANSCHLUESSE

Electrical connection (multi-pole, 25-pin, IP 65)

HANSA-FLEX

## Caracteristici

| | |
|---|---|
| **Medii** | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| **Presiune de lucru** | Max. vacuum 10 bar (external pilots), 3 to 7 bar (internal pilots as standard) |
| **Presiune de comandă** | 3 - 7 bar |
| **Domeniu de temperaturi** | -10 °C to +60 °C |
| **Debit** | 200 Nl/min (Ø 4), 500 Nl/min (Ø 6), 800 Nl/min (Ø 8) |
| **Număr de comenzi** | Max. 16 (e.g. 16 spring return valves) |
| **Operare auxiliară manuală** | Latching (bistable), Monostable (non-latching) version also available on request |
| **Putere absorbită** | 0.6 W per pilot |
| **Tip de protecţie** | IP 65 |

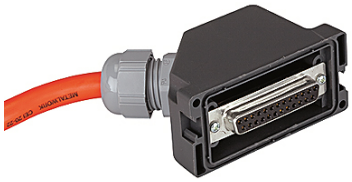

## Indicaţie

Alte date sunt disponibile la cerere.

## Descriere

These compact valve terminals, with a maximum flow rate of 800 Nl/min, can be individually adapted to the specific conditions of each application thanks tot he wide range of functions and various input and intermediate plates.Since each valve terminal is a customer-specific combination of a series of individual elements, the catalogue only lists the available input, intermediate and end plates as well as the different valve discs and the 25-pin multi-pole connectors.

## Informaţii suplimentare

Important: The scope of supply does not include a connector. Please order separately.

## Articol

| Denumire | Definiţie |
|---|---|
| **K- 07 15 22 45** | IP 67 connector, 25-pin, with 1 m cable |
| **K- 07 15 22 46** | IP 67 connector, 25-pin, with 2.5 m cable |
| **K- 07 15 22 47** | IP 67 connector, 25-pin, with 5 m cable |

*În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.*