

K-STECKVERBINDU ABSP

Stop unions

HANSA FLEX

Caracteristici

Presiune de lucru Max. 10 bar, vacuum

Domeniul de utilizare Air, vacuum

furtunuri recomandate PU or PA (nylon)


Medii Aer comprimat

Domeniu de temperaturi 0 °C to +60 °C

Suprafață de etanșare O-ring (NBR)

Material Plastic, Nickel plated brass

Inel de presiune Plastic

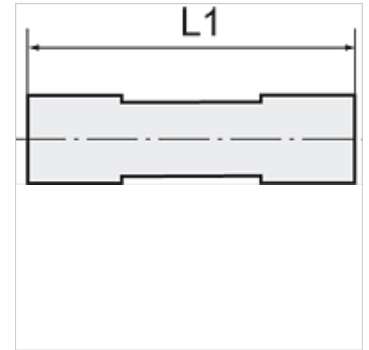

Indicație

Alte date sunt disponibile la cerere.

Descriere

The air supply is completely shut off as soon as the hose is disconnected from the union.
The flow rate is only guaranteed if the hose is securely inserted.

Articol

Denumire	pentru Ø exterior furtun	L1 (mm)
K- 07 40 08 59	4 mm	47,0
K- 07 40 08 60	6 mm	45,0
K- 07 40 08 61	8 mm	49,5
K- 07 40 08 62	10 mm	63,0
K- 07 40 08 63	12 mm	66,5