
K-WTEH SERIE ONE M DRS

Service units, »ONE« Series, with pressure switch

Caracteristici

Presiune de intrare	Max. 10 bar
Domeniu de temperaturi	-10 °C to +50 °C
Medii	Aer comprimat
Tip de protecţie	IP 65
Presiune de lucru	0.5 - 8 bar
Automat manometric	Changeover contact
Mărimea porilor în elementul filtrant	20 µm
Măsurarea valorii debitului	At 6,3 bar and Δp = 1 bar



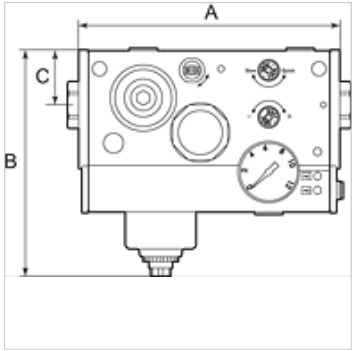

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

Indicaţii referitoare comandă

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

Articol

Denumire	Racord	Debit (L/min)	A (mm)	B	C (mm)	Tensiune
K- 07 25 13 82	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 83	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 84	G 1/2	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.