


K-STECKNIPPEL RED

push-in plugs, unequal

HANSA FLEX

Caracteristici

| | |
|-------------------------------|--|
| Presiune de lucru | Max. 15 bar, coarse vacuum |
| Domeniul de utilizare | Air, vacuum |
| furtunuri recomandate | PU or PA (nylon) |
| Medii | Compressed air and all gases or liquids that are compatible with the materials |
| Domeniu de temperaturi | -20 °C to +80 °C |
| Suprafață de etanșare | Parallel version: O-ring in housing, Conical version: thread coating |
| Material | Plastic, Nickel plated brass |
| Inel de presiune | Plastic |

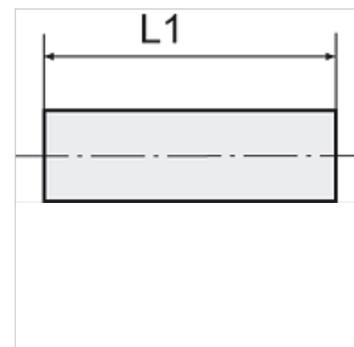

Indicație

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Articol

| Denumire | pentru Ø exterior furtun | L1 (mm) |
|----------------|--------------------------|------------|
| K- 07 40 42 83 | 6 mm / 4 mm | 37,5 |
| K- 07 40 42 84 | 8 mm / 4 mm | 40,5 |
| K- 07 40 42 85 | 8 mm / 6 mm | 42,5 |
| K- 07 40 42 86 | 10 mm / 6 mm | 44,5 |
| K- 07 40 42 87 | 10 mm / 8 mm | 47,0 |
| K- 07 40 42 88 | 12 mm / 8 mm | 49,5 |
| K- 07 40 42 89 | 12 mm / 10 mm | 51,0 |