
K-T-STECK VERS DRE AG-K BE 1

Male branch tees, swivel type, conical male thread, coated

Caracteristici

Presiune de lucru	Max. 16 bar
Temperatura de lucru	-20 °C to +150 °C
Material	Alamă nichelată
Inel de presiune	Nickel-plated brass
Inel de prindere	Stainless steel



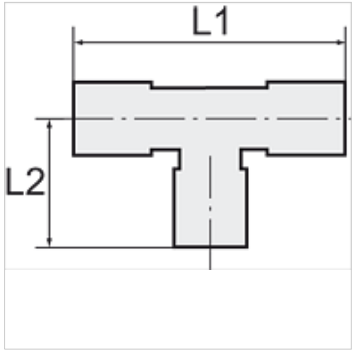

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Articol

Denumire	Filet	pentru Ø exterior furtun	L1 (mm)	L2 (mm)	Deschiderea cheii fixe
K- 07 40 28 18	R 1/8	4 mm	40,0	20,0	13 mm
K- 07 40 28 19	R 1/8	6 mm	43,0	20,0	13 mm
K- 07 40 28 20	R 1/8	8 mm	47,0	20,0	13 mm
K- 07 40 28 16	R 1/4	6 mm	43,0	25,0	14 mm
K- 07 40 28 17	R 1/4	8 mm	47,0	25,0	14 mm
K- 07 40 28 15	R 1/4	10 mm	53,0	26,0	16 mm
K- 07 40 28 21	R 3/8	8 mm	47,0	28,0	18 mm
K- 07 40 48 02	R 3/8	10 mm	53,0	30,0	18 mm
K- 07 40 48 03	R 3/8	12 mm	58,0	32,5	20 mm
K- 07 40 48 01	R 1/2	12 mm	58,0	35,5	22 mm

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.