

K-VSTO POM
Plugs

Caracteristici

Presiune de lucru	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Temperatura de lucru	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Material	Acetalpolymerisat (POM)
Material de etanşare	NBR



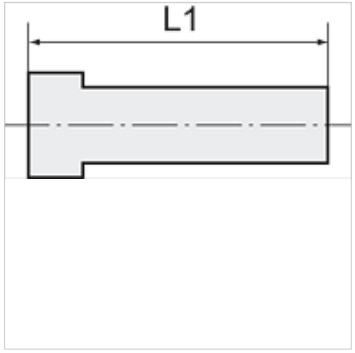

Indicaţie
Alte date sunt disponibile la cerere.

Descriere
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articol

Denumire	Culoarea	L1 (mm)	Ştuţuri (mm)
K- 07 40 29 11	roşu	28,0	4
K- 07 40 29 12	roşu	28,0	5
K- 07 40 29 13	roşu	30,0	6
K- 07 40 29 14	roşu	31,0	8
K- 07 40 29 15	roşu	36,5	10
K- 07 40 29 16	roşu	38,5	12
K- 07 40 29 17	negru	45,0	15
K- 07 40 29 18	negru	41,5	18
K- 07 40 29 19	negru	45,0	22
K- 07 40 29 20	negru	56,0	28

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.