
K-RD STUECKE PP

Reducers

Caracteristici

Presiune de lucru	on request
Temperatura de lucru	Max. +20 °C
Material	Polypropylene (PP)
Material de etanşare	NBR



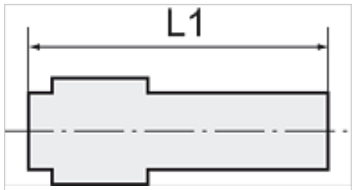

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articol

Denumire	pentru Ø exterior furtun	L1 (mm)	Ştuţuri (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.