
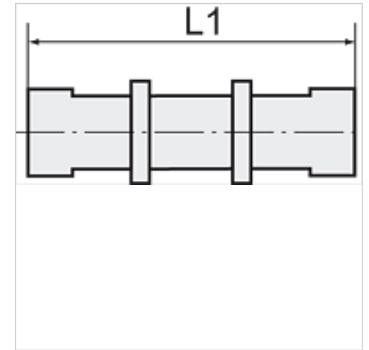


K-SCHOTT-STECKVERB ABSP

Female bulkhead stop unions (pressure max. 10 bar)

Caracteristici

Presiune de lucru	Max. 10 bar, vacuum
Domeniul de utilizare	Air, vacuum
furtunuri recomandate	PU or PA (nylon)
Medii	Aer comprimat
Standard	M thread acc. to DIN 13-1, with O-Ring
Domeniu de temperaturi	0 °C to +60 °C
Material	Plastic, Nickel plated brass
Inel de presiune	Plastic



Indicație

Alte date sunt disponibile la cerere.

Descriere

The air supply is completely shut off as soon as the hose is disconnected from the union.
The flow rate is only guaranteed if the hose is securely inserted.

Articol

Denumire	Filet	pentru Ø exterior furtun	L1 (mm)	Deschiderea cheii fixe
K- 07 40 43 74	M 12 x 1.5	4 mm	41,0	14 mm
K- 07 40 43 75	M 14 x 1,5	6 mm	44,5	17 mm
K- 07 40 43 76	M 16 x 1,5	8 mm	50,3	19 mm
K- 07 40 43 77	M 20 x 1,5	10 mm	58,5	24 mm
K- 07 40 43 78	M 24 x 1,5	12 mm	62,2	27 mm