

# K-DRV 1

## Unidirectional flow control valves

### Caracteristici


Presiune de lucru max. 10 bari

Temperatura de lucru Max. 70 °C

Material de etanșare NBR

Carcasă Aluminium

Piese interioare Aluminium/Brass

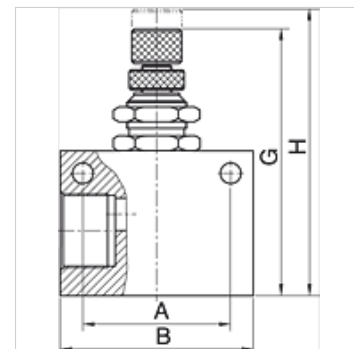

### Indicație

Alte date sunt disponibile la cerere.

### Articol

Denumire	Filet	A (mm)	B (mm)	G (mm)	H (mm)
K- 07 30 12 32	G 1/8	22,0	32,0	46,90	52,3
K- 07 30 12 33	G 1/4	26,0	36,0	50,80	56,3
K- 07 30 12 34	G 3/8	35,0	50,0	65,00	74,0
K- 07 30 12 35	G 1/2	35,0	50,0	65,00	74,0