


# K-L-MEHRFACHVERT 4 DR AGR OR

Multiple union elbows with outer hex, 4 outlets, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Caracteristici

|                        |  |
|------------------------|--|
| Presiune de lucru      | Max. 15 bar, coarse vacuum   |
| Domeniul de utilizare  | Air, vacuum  |
| furtunuri recomandate  | PU or PA (nylon)   |
| Medii                  | Compressed air and all gases or liquids that are compatible with the materials |
| Domeniu de temperaturi | -20 °C to +80 °C   |
| Suprafață de etanșare  | Parallel version: O-ring in housing  |
| Material               | Plastic, Nickel plated brass   |
| Inel de presiune       | Plastic  |

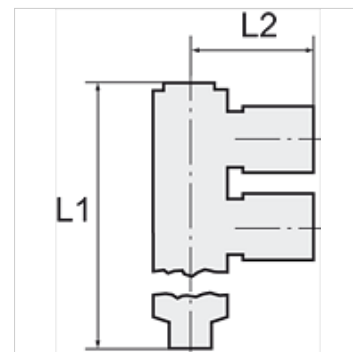

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Articol

| Denumire       | Filet | pentru Ø exterior furtun | L1<br>(mm) | L2<br>(mm) | Deschiderea cheii fixe |
|----------------|-------|--------------------------|------------|------------|------------------------|
| K- 07 40 43 29 | G 1/8 | 6 mm                     | 41,0       | 24,0       | 12 mm                  |
| K- 07 40 43 30 | G 1/8 | 8 mm                     | 44,0       | 28,5       | 14 mm                  |
| K- 07 40 43 27 | G 1/4 | 6 mm                     | 43,0       | 24,0       | 14 mm                  |
| K- 07 40 43 28 | G 1/4 | 8 mm                     | 46,0       | 28,5       | 17 mm                  |
| K- 07 40 43 26 | G 1/4 | 10 mm                    | 55,5       | 33,7       | 19 mm                  |
| K- 07 40 43 31 | G 3/8 | 10 mm                    | 56,5       | 33,7       | 19 mm                  |
| K- 07 40 43 32 | G 3/8 | 12 mm                    | 63,5       | 37,5       | 24 mm                  |
| K- 07 40 43 25 | G 1/2 | 12 mm                    | 65,0       | 37,5       | 24 mm                  |